


BASS MIDRANGE

102065N

AP100G0 M08PGL2511
102066A

Dec .98


Shielded 4" coated paper cone
High impact polymer chassis

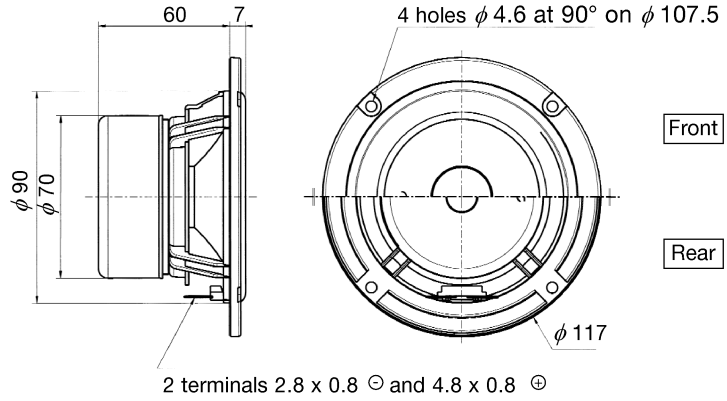


All dimensions in mm

- Fully shielded magnet system for audio video applications
- Non resonant high impact polymer chassis
- Built in cosmetic ring designed for front-rear and recessed mounting
- Coated paper cone
- High loss rubber surround
- High temperature voice coil

Response Curve

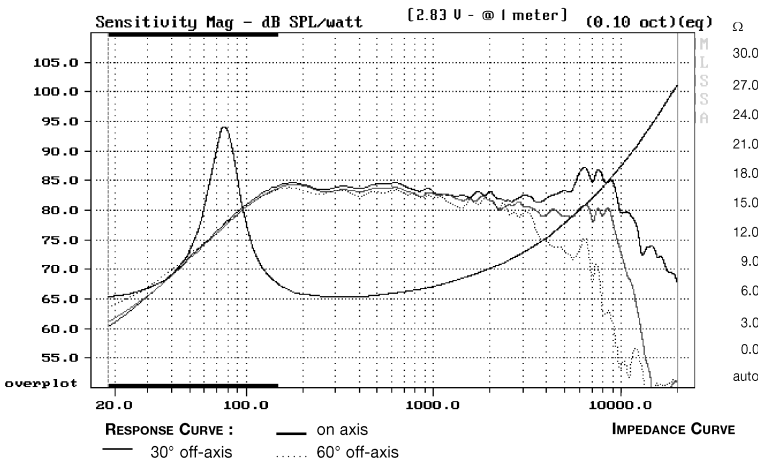

Waterfall

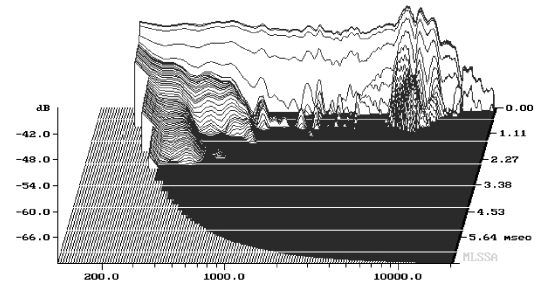

SPECIFICATIONS

Technical characteristics	Symbol	Value	Units
PRIMARY APPLICATION			
Nominal Impedance	Z	6	Ω
Resonance Frequency	Fs	75,7	Hz
Nominal Power Handling	P	30	W
Sensitivity (2,83 V - 1m)	E	84,5	dB
VOICE COIL			
Voice Coil Diameter	ϕ	25	mm
Minimum Impedance	Zmin	6,2	Ω
DC Resistance	Dcr	5,7	Ω
Voice Coil Inductance	Lbm	0,49	mH
Voice Coil Length	h	9,4	mm
Former	-	Aluminium	-
Number of Layers	n	2	-
Wire type	-	round	-

MAGNET

Magnet Dimensions	ϕ x h	60×10 31×09	mm
Magnet Weight	m	$0,105$ $0,100$	kg
Flux Density	B	1	T
Force Factor	BL	3,92	NA ⁻¹
Height of Magnetic Gap	He	4	mm
Stray Flux	Fmag	-	Am ⁻¹
Linear Excursion	Xmax	$\pm 2,7$	mm

PARAMETERS

Suspension Compliance	Cms	949	μ m/N
Mechanical Q Factor	Qms	2,53	-
Electrical Q Factor	Qes	0,78	-
Total Q Factor	Qts	0,60	-
Mechanical Resistance	Rms	0,87	kg s ⁻¹
Moving Mass	Mms	4,66	g
Effective Piston Area	S	50,27	cm ²
Volume Equivalent of Air at Cas	Vas	3,37	liters

Suggested Applications

Vb	Fb	Dp	Lp	F-3
liters	Hz	cm	cm	Hz
6	-	-	-	74,8
-	-	-	-	-