


INDUSTRIAL SERIES

Bass midrange or wide band applications
 Paper cone
 Corrugated paper suspension
 High temperature voice coil
 Stamped steel chassis

Utilisation large bande ou 2 voies
 Cône papier
 Suspension corruguée papier
 Bobine haute température
 Châssis acier embouti



RESPONSE CURVE
 refer to page 16

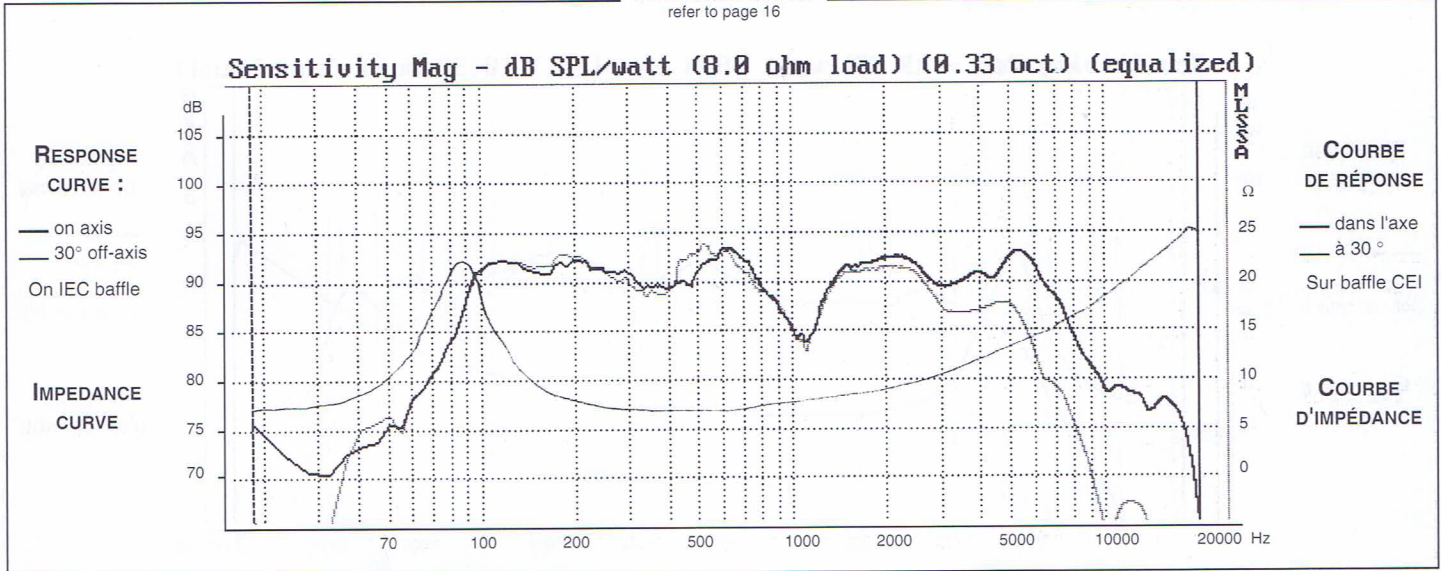

SPECIFICATIONS			
Technical Characteristics	Symbol	Value	Units
PRIMARY APPLICATIONS			
Nominal Impedance	Z	8	Ω
Resonance Frequency	Fs	80	Hz
Nominal Power Handling	P	30	W
Sensitivity	E	91	dB
VOICE COIL			
Voice coil diameter	Ø	25	mm
Voice coil length	h	10	mm
DC Resistance	Re	5,7	Ω
Former	-	Aluminium	-
MAGNET			
Magnet dimensions	Ø x h	72 x 15	mm
Magnet weight	m	240.10 ⁻³	kg
Force factor	BL	4	NA ⁻¹
Linear excursion	Xmax	±3	mm
PARAMETERS			
Total Q Factor	Qts	0,58	-
Moving Mass	Mms	4.10 ⁻³	kg
Volume Eq. of Air at Cas	Vas	8,4.10 ⁻³	m ³
Mass of speaker	M	630.10 ⁻³	kg

Designed for compact 2-way and multi-purpose wide band applications, this 5 1/4" paper cone driver has a corrugated paper surround coated with a rubber based damping compound. The high temperature voice coil wound on an aluminium former ensures high power handling capacity.

Ce haut-parleur de 130 mm à cône papier et suspension corruguée papier amortie par un traitement visco-élastique est destiné à des systèmes 2 voies compacts de qualité ou à l'utilisation en large bande. Une bobine haute température sur support aluminium lui confère une bonne tenue en puissance.

